



## How to setup Iridium GO!


## 1. Set up a new device on the portal

1. Log on to the Proximity portal using an account with privileges for adding devices.
2. Click on the "Devices" tab in the top left menu.
3. Click the "+" icon in the Devices area.
4. Complete the "Add Device" form, entering the device's IMEI in the "Device Id" field, the device's phone number in the "Phone Number" field and selecting "IridiumGO!" from the "Device Type" drop-down list.
5. When complete, click the "OK" button.

## 2. Configure the Iridium GO! With the Web Interface

### Tracking

1. Log on to the device's web administrative interface. Please refer to the device's documentation if you do not know how to do this.
2. Click "Location Options" from the banner menu:

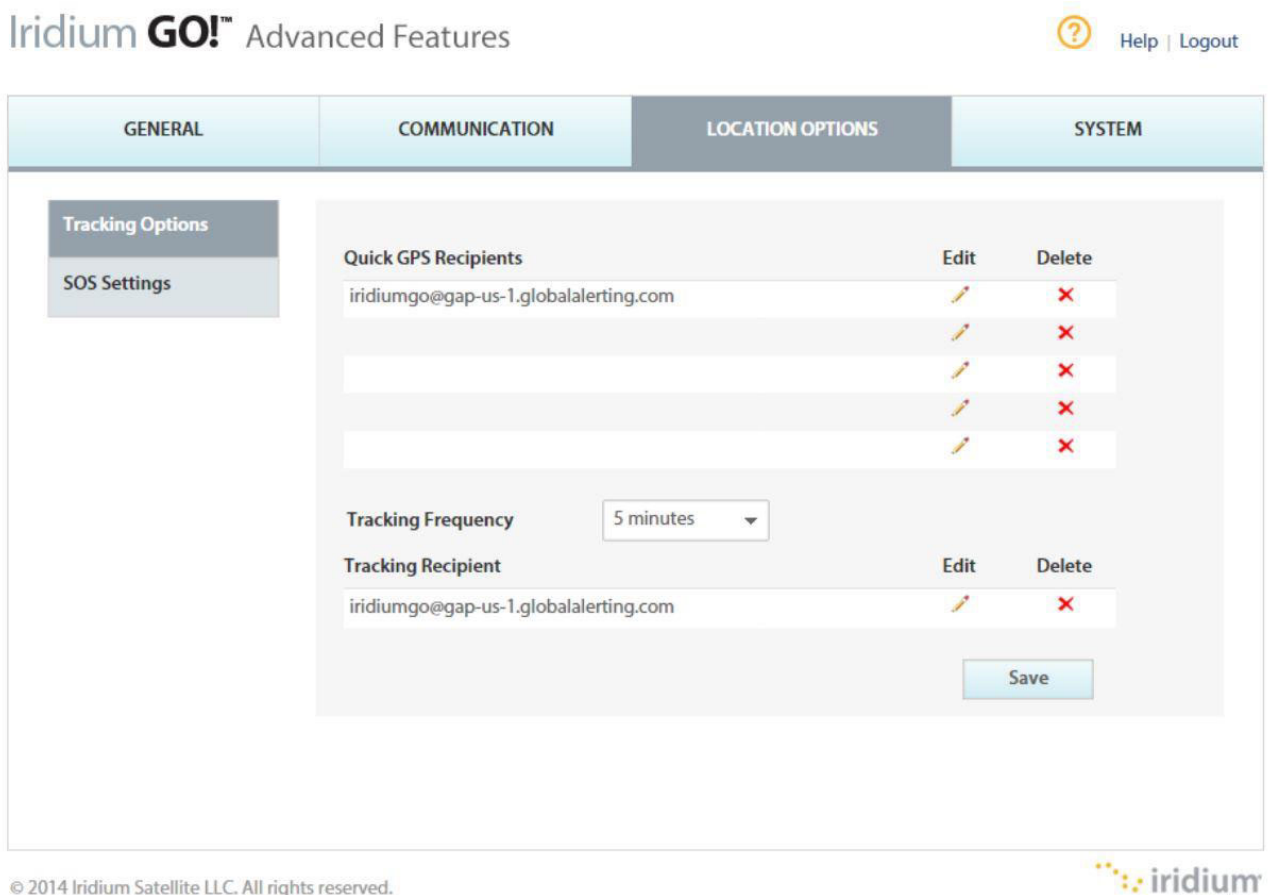

The screenshot shows the "Iridium GO! Advanced Features" web interface. At the top, there are four tabs: GENERAL, COMMUNICATION, LOCATION OPTIONS (selected), and SYSTEM. Below the tabs, there is a sidebar with "Tracking Options" and "SOS Settings". The main content area is titled "Quick GPS Recipients" and contains a table with columns for "Edit" and "Delete". The table has four rows, each with a text input field and corresponding edit/delete icons. Below the table, there is a "Tracking Frequency" dropdown menu set to "5 minutes". Below that, there is a "Tracking Recipient" section with a text input field containing "iridiumgo@gap-us-1.globalalerting.com" and edit/delete icons. A "Save" button is located at the bottom right of the form.

© 2014 Iridium Satellite LLC. All rights reserved.

iridium  
Everywhere

3. Enter the following e-mail address in the "Tracking Recipient" text box: iridiumgo@gap-us-1.globalalerting.com
4. Select the desired tracking frequency from the "Tracking Frequency" drop-down list.
5. Click "Save"

























If required, you can also enter the email address into the “Quick GPS Recipients” list to have Quick GPS messages also forwarded and displayed on Proximity.

## Configuring SOS

If you choose not to use the GEOS service, then configuring the SOS recipients is similar to tracking recipients above. The Iridium GO! will initiate a call to the number specified. If required, we can provide a dedicated number that will automatically answer and record any voice communications.

### Iridium GO!™ Advanced Features

 [Help](#) | [Logout](#)

| GENERAL  | COMMUNICATION   | LOCATION OPTIONS  | SYSTEM |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
|--|---|---|--------|--|------|--------|-----------------|---|---|--|------|--------|---------------------------------------|---|---|--|---|---|--|---|---|
| <div> <div>Tracking Options</div> <div>SOS Settings</div> </div>   |   |   |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
| <p>To enable access to GEOS emergency response services, provided at no additional fee, you must register online at <a href="http://www.geosalliance.com/iridium">www.geosalliance.com/iridium</a></p> <p>NOTE: If SOS is activated, a valid Iridium SIM is required and standard airtime charges will be applied.</p> <div> <div> <p>GEOS Service</p> <p><input type="radio"/> Use <input checked="" type="radio"/> Do not use</p> </div> <div> <p>You have selected not to use the GEOS Service. You must enter your own emergency call and message recipients to complete the SOS configuration.</p> </div> </div> <div> <p>SOS Action</p> <p>Call and Message</p> </div> <div> <p>Preferred Spoken Language</p> <p>English</p> </div> <div> <p>Call Recipient</p> <table border="1"> <thead> <tr> <th></th> <th>Edit</th> <th>Delete</th> </tr> </thead> <tbody> <tr> <td>+XXXXXXXXXXXXXX</td> <td></td> <td></td> </tr> </tbody> </table> </div> <div> <p>Message Recipients</p> <table border="1"> <thead> <tr> <th></th> <th>Edit</th> <th>Delete</th> </tr> </thead> <tbody> <tr> <td>iridiumgo@gap-us-1.globalalerting.com</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table> </div> <div> <p>Save</p> </div> |   |   |        |  | Edit | Delete | +XXXXXXXXXXXXXX |  |  |  | Edit | Delete | iridiumgo@gap-us-1.globalalerting.com |  |  |  |  |  |  |  |  |
|  | Edit  | Delete  |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
| +XXXXXXXXXXXXXX  |  |  |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
|  | Edit  | Delete  |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
| iridiumgo@gap-us-1.globalalerting.com  |  |  |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
|  |  |  |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |
|  |  |  |        |  |      |        |                 |   |   |  |      |        |                                       |   |   |  |   |   |  |   |   |

© 2014 Iridium Satellite LLC. All rights reserved.

 **iridium**  
Everywhere

## Configure the Iridium GO! With the Smartphone App

You can also configure the Iridium GO! using the “Settings” feature of the Iridium GO! app.

